



GOLDEN STATE INSTRUMENT CO.

GS-6300 IL

INFRARED ILLUMINATOR


Features:

- * Applications for the camera include operating at night and a transmission range of approximately to 40m (120 ft) indoor & 30m(90 ft) outdoors.
- * Applications include use with cameras that can detect the infrared
- * Use high-speed IR LED (60 pcs) , lifetime approximately 10, 000 hours.
- * Aluminum housing and fully sealed structure is available for use in / outdoors. Auto ray-swit-cher of 20Lux can operate at night or in a weak light condition.
- * Transmission angle: 30° .
- * Bracket is discretional adjusted.
- * DC12V / 600mA (47- 63Hz)
- * Dimension: $\Phi 3.2''$ (82mm) \times L 3.3'' (85mm) * Net weight: 820g.



DC12V POWER IN

INSTALLATION METHODS:

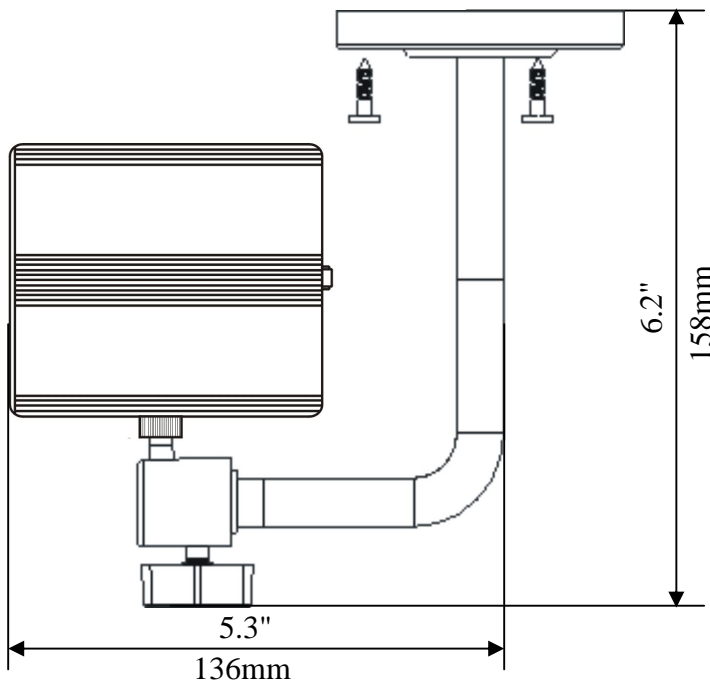

ACCESSORIES:

This package includes:

- 1. INFRARED ILLUMINATOR \times 1pcs**
- 2. Instruction sheet \times 1pcs**
- 3. Switching Power Transformer:
100-240VAC/12VDC 2.1A \times 1pcs**
- 4. 12 inch DC Pigtail \times 2pcs**

**WARNING: Observe Correct Voltage and Polarity
Do Not Point Camera Directly Into Sun
Failure To Observe Warnings May Void Warranty**

3002 Dow Avenue, suite 228, Tustin, CA 92780 USA · 1-800-227-2330 · Fax(714) 838-8558

Website: www.goldenstateinst.com · E-mail: gsi@goldenstateinst.com