



GOLDEN STATE INSTRUMENT CO.

GS-4001BMC

1/3" B/W Mini Camera

The B/W Mini Camera incorporates advanced 1/3" CCD sensor and high performance signal control circuitry.

It's **EIA** system incorporates the 1/3" sensor 250,000 pixels.

It's **CCIR** system incorporates the 1/3" sensor 290,000 pixels.

FEATURES:

* **High quality picture, aesthetic and easy to install**

This is a good complement for your line of CCTV system.

* **Auto Gain Control (AGC)**

This AGC function provides clear image in low light condition.

* **Auto exposure (AE)**

Camera can adjust to any light source condition.

* **Aperture Correction**

Adding Aperture Correction allows picture to be more clear.


SPECIFICATIONS:

IMAGE SENSOR	1/3" CCD Image Sensor
HORIZONTAL RESOLUTION	More than 420 TV line(Max.)
SCANNING SYSTEM	2:1 Interlace
SENSITIVITY	0.1 Lux F1.2
SYNCHRONIZATION	Internal
S/N RATIO	More than 48dB
ELECTRONIC SHUTTER	Auto and up to 1/100,000
VIDEO OUTPUT	1 Vpp, 75 Ohm Composite
LENS	3.6mm
POWER SUPPLY	DC 12V ($\pm 10\%$)
POWER CONSUMPTION	85mA ± 10 under DC 12V
AUTO GAIN CONTROL	Full Auto
BACK LIGHT COMPENSATION	Full Auto
APERTURE CORRECTION	1H Mode of H. aperture correction
DIMENSIONS	65mm \times 48mm \times 48mm
NET WEIGHT	108g
STORAGE TEMPERATURE	-30 TO +60 Degree C
OPERATING TEMPERATURE	-10 TO +45 Degree C

Specifications are subject to change without notice.

FUNCTION:

1. DC12V Power Supply.
2. Video Signal Output Connector.

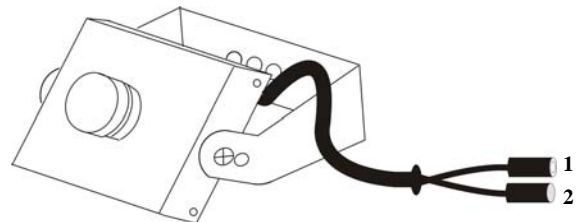

ATTENTION: Please remove the camera lens cap. Then the camera is ready for use.

14256 Doolittle Drive · San Leandro, CA 94577 · 1-800-227-2330 · Fax(510)352-5988

Website: www.goldenstateinst.com · E-mail: gsi@goldenstateinst.com